# 13F-2Z-C2 RELAY SOCKET

File No.:R50038275

File No.:E133481

Screw terminal,
DIN rail or Screw mounting,
With finger protection device

## CHARACTERISTICS

| | |
|---|---|
| Ambient temperature : | -40 ˚C to 70˚C |
| Rated voltage: | 250VAC |
| Rated current : | 15A (per pole) |
| Dielectric strength(Min.) : | 2000VAC |
| Steel retainer : | available |
| Retainer type : | 13F-H2 |
| White plastic tag : | non-available |
| Modules : | non-available |
| Terminal Torque : | 1.0 Nm |
| Wire strip length : | 7mm |
| Max. wire range : | 2x1.5mm$^2$ |
| Applicable relay type: | HF13F (2 poles) |

## DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm

### Outline Dimensions

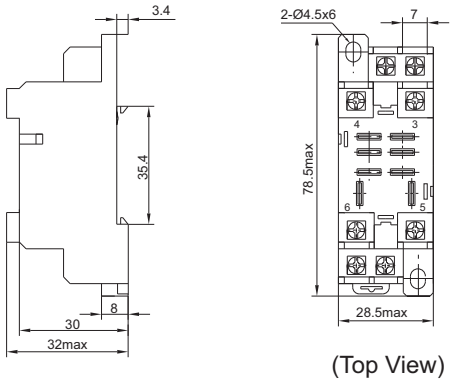


(Top View)

### PCB Layout




### Retainer Dimensions

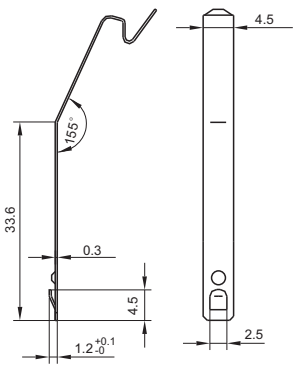


### Wiring Diagram




(Top View)