18FF-2Z-C1 RELAY SOCKET

File No.:R2033973

File No.:E253370

Screw Terminal,
DIN rail/Screw mounted
without Finger Protection Device

CHARACTERISTICS

Ambient temperature :	-40 ˚C to +70˚C
Rated voltage:	300VAC
Rated current :	12A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PA66+GF V0 (UL)
Contacts spring material :	QSn6.5-0.1
Steel retainer :	available
White plastic tag :	non-available
Modules:	non-available
Terminal torque :	0.8 Nm
Wire strip length :	7mm

Applicable relay type: JZX-18FF (HF18FF) (2 poles)

DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm

Outline Dimensions

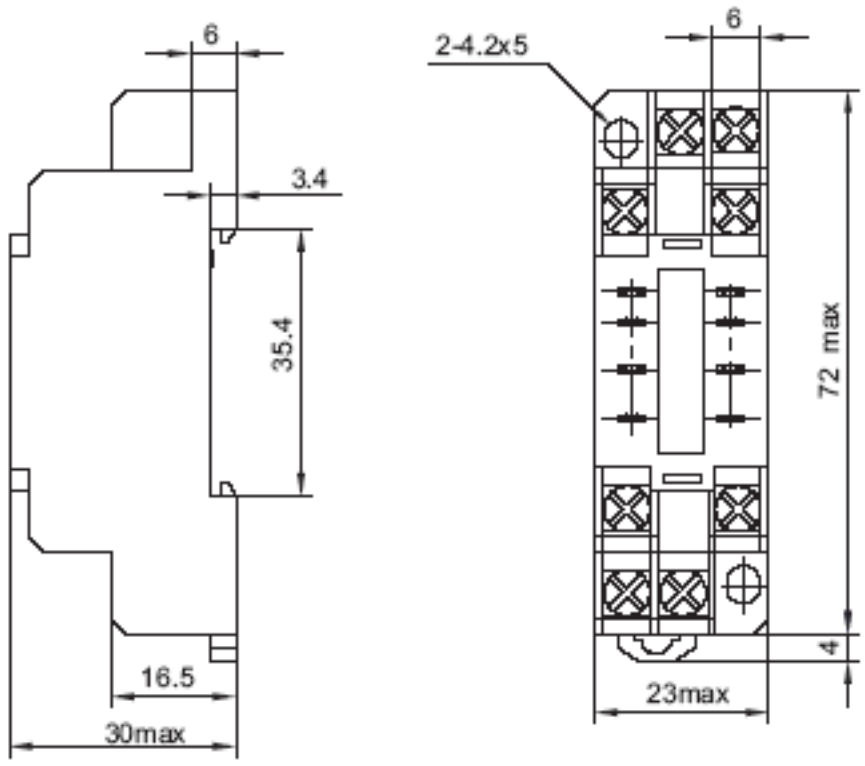

(Top View)

PCB Layout

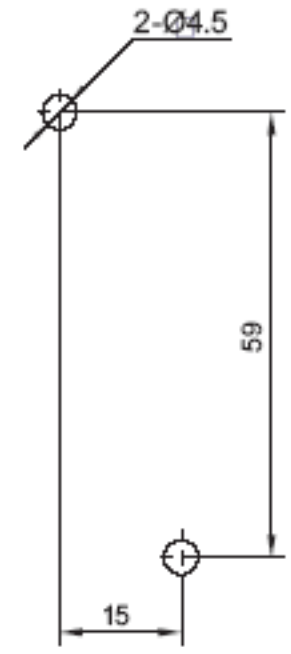

Wiring Diagram

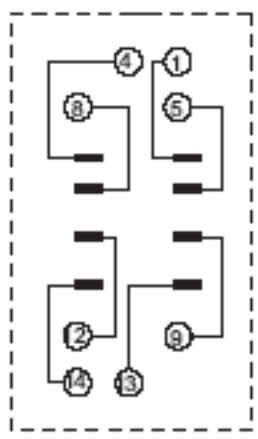

(Top View)
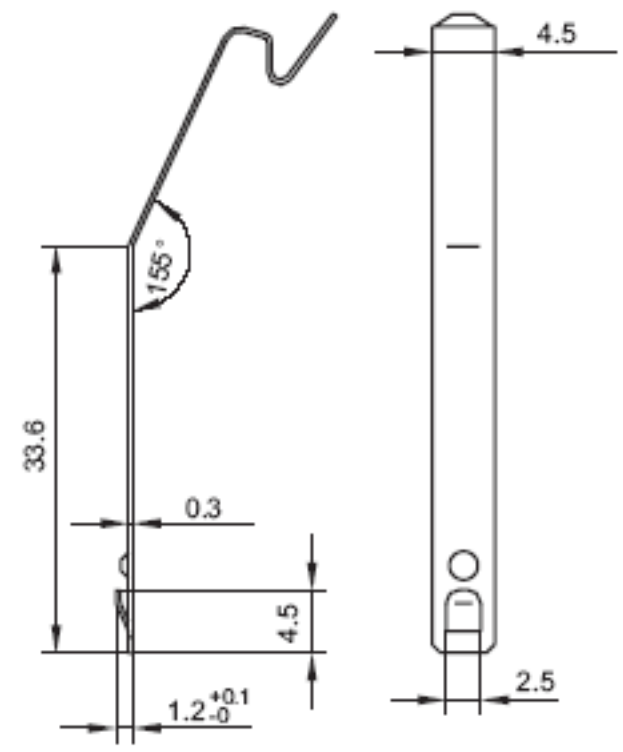
Retainer Dimensions